

SJ16 VERTICAL MAST LIFTS





STANDARD FEATURES

- Drivable at full height
- Variable speed, front two wheel hydraulic drive
- Zero inside turning radius
- Wet disc SAHR brakes
- Proportional controls
- 0.41 m traversing platform
- 24V DC power source
- Low voltage battery protection
- 30% gradeability
- Solid rubber, non-marking tyres
- Pothole protection system
- Wiring for AC outlet at platform
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Lanyard attachment points
- Operator horn
- Dual lashing lights
- Lift rings/tie downs
- Full height spring hinged gate
- Relay based control system
- Colour coded and numbered wiring system

SJ16 VERTICAL MAST LIFTS

Dimensions	SJ16
A Work Height	6.75 m
B Raised Platform Height	4.75 m
C Lowered Platform Height	0.45 m
D Overall Width	0.77 m
E Overall Length	1.37 m
F Stowed Height	1.79 m
G Platform Width (Inside Dimension)	0.69 m
H Platform Length (Outside Dimension)	0.93 m

Specifications	SJ16
Ground Clearance (Stowed)	5.33 cm
Ground Clearance (Raised)	1.60 cm
Weight	966 kg
Local Floor Load (with rated load)	827 kPa
Local Floor Load (no load)	634 kPa
Gradeability	30%
Turning Radius (Inside)	0
Turning Radius (Outside)	1.40 m
Drive Speed (Stowed)	4.0 km/h
Drive Speed (Raised)	0.80 km/h
Maximum Drive Height	Full Height
Capacity (Overall)	227 kg
Maximum # of Persons	2

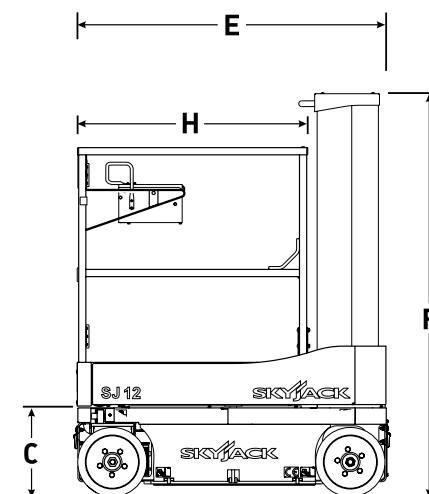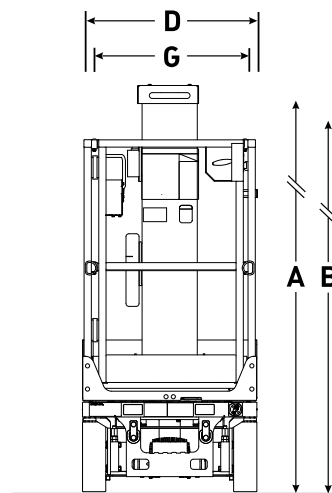

Skyjack Australia Pty Ltd
 4 Coates Place
 Wetherill Park
 New South Wales, 2164
 Tel: +61 (0) 2878 63200
 Fax: +61 (0) 2878 63222
 Email: jcranmer@skyjack.com

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. AS marked platforms are in conformance to Standard AS/NZS 1418.10:2011.