

ES1932

ELECTRIC SCISSOR LIFT

SCISSOR LIFT

JLG

Performance

Platform Height	5.80 m
Platform Capacity	230 kg
Capacity on Platform Extension	120 kg
Occupants (Indoor/ Outdoor)	2 /1
Lift/Lower Time	22/24 Seconds
Maximum Drive Height	Full Height
Weight*	1550 kg
Ground Bearing Pressure	8.0 kg/cm ²
Drive Speed–Elevated	0.8 km/h
Drive Speed–Lowered	4.8 km/h
Gradeability	25%
Turning Radius (Inside)	Zero
Turning Radius (Outside)	1.7 m

* Certain options or country standards will increase weight.

Standard Specifications

Power Source

Batteries	4 x 6V 220 amp-hr
Charger	27 amp
Drive	24V Electric Front Wheel

Hydraulic Reservoir

• Capacity	12 L
• Pump	Fixed Displacement Gear

Tyres

• Tyre Size/Type (Non-Marking)	232 x 102 mm
--------------------------------	--------------

Brakes

• Electric / Multi-Disc Friction



Standard Features

- Proportional Controls
- Load Sensing System
- DC Electric Drive
- Smart Battery Charger CAN Enabled
- Battery Condition Indicator
- All Motion Alarm
- Horn
- Hourmeter
- Tilt Alarm and Light
- Lanyard Attach Points
- Moveable, Removable Platform Control
- Nickel Plated Pins
- Lubrication Free Scissor Arm Bushings
- Scissor Maintenance Prop
- Active Pothole Protection System
- Lifting and Tie Down Points
- Fork Lift Pockets
- Foot-Actuated Deck Extension
- Steel Swing-Out Doors
- Variable Tilt Visual Zone Indicator
- Manual Descent Cable
- Diamond Tread Steel Deck
- Greaseless Kingpin Joints
- Analyzer Port for Diagnostics
- Dynamic Braking
- Flashing Amber Beacon
- Self Closing, Self Latching Gate
- USB Charger and phone Holster
- MDI (Ground)
- Drive Motor Covers
- AS/NZS 1418.10 Compliance

Accessories & Options

- Fire Extinguisher
- Anti-Vandalism Package for Ground Controls and Platform Controls
- Ambient Noise (Squawker) Alarm
- AC Outlet To Platform incl. ELCB
- Mesh to Top Rail
- ClearSky
- SkySense
- Access Control
- Mobile Control
- Pipe Racks
- Panel Carrier

ES1932


ELECTRIC SCISSOR LIFT

SCISSOR LIFT



Dimensions

All dimensions are approximate.

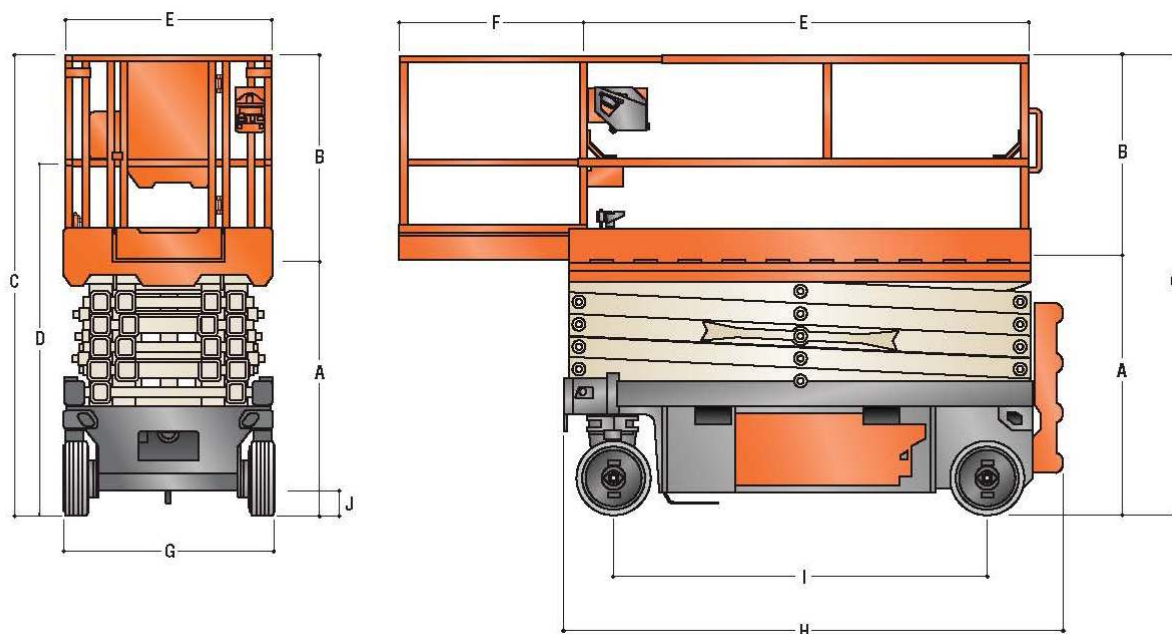

A. Platform Height-Lowered	1.00 m
B. Platform Railing Height Fixed Rails	1.01 m
B. Platform Railing Height Folding Rails	1.12 m
B. Platform Railing Height Dual Rails	1.13 m
C. Overall Height Fixed Rails	1.99 m
C. Overall Height Folding Rails	2.10 m
D. Overall Height (Rails Lowered) Fixed Rails	1.99 m
D. Overall Height (Rails Lowered) Folding Rails	1.63 m
D. Overall Height (Ground to Top Rail) Folding/Dual Rails	2.10 m
D. Overall Height (Rails Folded) Dual Rails	1.77 m
E. Platform Size	0.64 x 1.59 m
F. Platform Extension	0.87 m
G. Overall Width	0.81 m
H. Overall Length	1.70 m
I. Wheelbase	1.30 m
J. Ground Clearance	0.07 m



The JLG "2 & 5" Warranty

JLG Industries, Inc. backs its products with its exclusive "2 & 5" Warranty. We provide coverage on all products for one (2) full year and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/ or equipment changes without prior notification. This machine meets or exceeds AS/NZS 1418.10 2011 as originally manufactured for intended applications.

R032223

JLG Industries (Australia)
358 Park Road
Regents Park, NSW 2143
Telephone 02 8718 6300
Fax 02 8718 6377
www.jlg.com.au

An Oshkosh Corporation Company

