

LGMG

H625

TELEHANDLER

6m

WORKING HEIGHT

2500kg


RATED LOAD




LGMG TELEHANDLER

SPECIFICATIONS

MODELS	H625	
Measurements	Metric	Imperial
A Max. Lifting Height	5.94m	19'6"
Max. Outreach	3.41m	11'2"
B Overall Length	3.99m	13'1"
C Overall Width	1.86m	6'1"
D Overall Height	1.97m	6'6"
E Wheelbase	2.3m	7'7"
Ground Clearance	0.32m	1'1"
PRODUCTIVITY		
Max. Capacity	2,500kg	5512 lbs
Gradeability-Unladen	45%	
Min. Turning Radius	3.36m	11'
Tilt Angle	±5°	
Drive /Steering Mode	4 Wheel Drive / 4 Wheel Steer	
Primary Boom Ascending Time	9s	
Primary Boom DescendingTime	6.5s	
Boom Extending Time	6s	
Boom Retracting Time	4s	
Forward - First Gear Travel Speed	10km/h	6.2mph
Forward - Second Gear Travel Speed	24.9km/h	15.5mph
Backward - First Gear Travel Speed	10km/h	6.2mph
Backward - Second Gear Travel Speed	24.9km/h	15.5mph
Service brake	Multi-disc wet brake of front axle	
Standard Tyres	12-16.5-12-TL	
ENGINE		
Manufacturer	Kubota	
Rated Power	54.6kW	73.2hp
Max. Torque	261.1N.m	192.6 lb.ft
Displacement	3,331ml	203.3 cu.in
Fuel Tank Capacity	63L	16.6 gal
Maximum traction force	39kN	
HYDRAULIC SYSTEM		
Working pump displacement	84 l/min	22 US gpm
Hydraulic Oil Capacity	75L	19.8 gal
WEIGHT		
Machine Weight	5,050kg	11,134 lbs

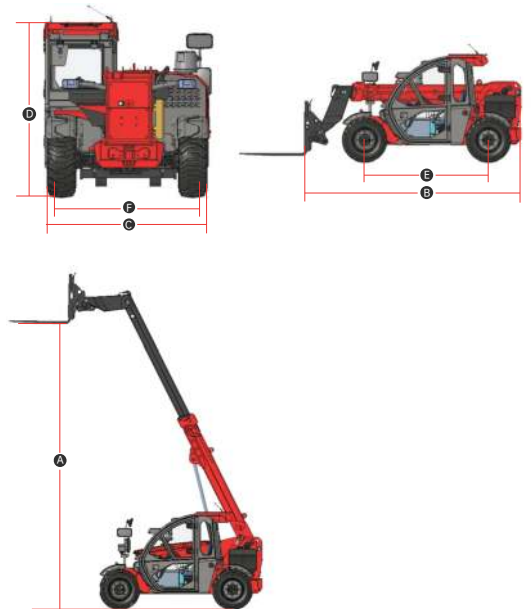

ROUGH TERRAIN LOAD CHART

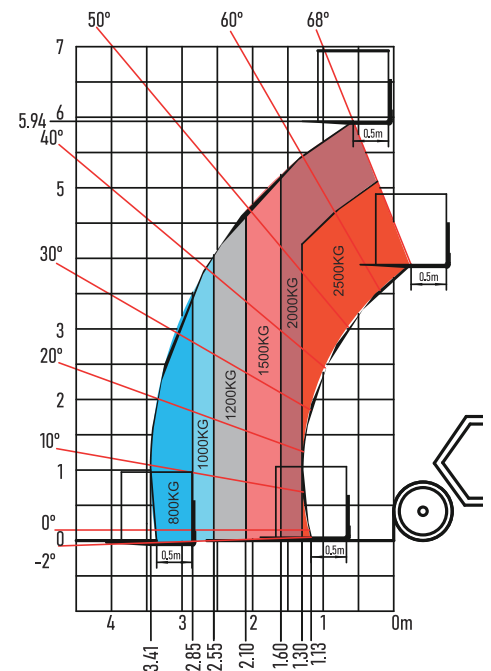

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China

Email: sales@lgmg.com.cn Tel: +86 531 6787 9283

www.lgmglifts.com



RELIABILITY IN ACTION