

SJ4726/32

ELECTRIC SCISSORS



STANDARD FEATURES

- Drivable at full height
- Variable speed, rear wheel hydraulic drive
- Dual holding brakes
- SKYCODED™ Colour coded and numbered wiring system
- On-board visual interface with diagnostic capabilities
- Shroud style, impact resistant composite control box with extended cable
- Proportional controls for drive & lift functions
- Tilt sensor (3.5° x 1.5°)
- 1.22 m Roll out extension deck
- 24V DC Power source
- Low voltage battery protection
- 25% Gradeability
- Solid rubber, non-marking tyres
- Pothole protection system
- Wiring for AC outlet at platform
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Lanyard attachment points
- Operator horn
- Forklift pockets and tie down/lift lugs
- Overload sensing system
- Fold down hinged railing system
- Half height spring hinged entry gate
- Telematics ready
- White noise alarm
- Flashing light

OPTIONS

- Light duty pipe rack
- Heavy duty pipe rack
- Board carrier
- Tool caddy
- Dual flashing lights
- AGM Batteries
- Lockable swingout trays
- Full height spring hinged entry gate
- Bio oil
- Secondary Guarding Lift Enable (SGLE)
- ECOTRAY leak containment system
- ELEVATE telematics
- ELEVATE Battery Management System (BMS)*



† Standard lead times may be increased when optional equipment is added, consult factory.

‡ Capacities and machine weights may differ when options are added.

* Only available with ELEVATE telematics

SJ4726/32 ELECTRIC SCISSOR LIFT

Dimensions	SJ4726
A Work Height	9.82 m
B Raised Platform Height	7.82 m
C Lowered Platform Height	1.17 m
D Overall Width	1.19 m
E Overall Length	2.32 m
F Stowed Height (Rails Up)	2.29 m
G Stowed Height (Rails Down)	1.90 m
H Platform Width (Inside Dimension)	1.07 m
I Platform Length (Inside Dimension)	2.11 m
Specifications	SJ4726
Extension Deck (Roll Out)	1.22 m
Ground Clearance (Pothole Raised)	10.2 cm
Ground Clearance (Pothole Deployed)	1.8 cm
Wheelbase	1.75 m
Weight	2,135 kg
Gradeability	25%
Turning Radius (Inside)	0.71 m
Turning Radius (Outside)	2.64 m
Lift Time (With Rated Load)	52 sec
Lower time (With Rated Load)	32 sec
Drive Speed (Stowed)	2.9 km/h
Drive Speed (Raised)	1.0 km/h
Maximum Drive Height	Full Height
Capacity (Overall)	454 kg
Distributed Capacity (Main Platform)	318 kg
Distributed Capacity (Extension Deck)	136 kg
Local Floor Load (With Rated Load)	856 kN/m ²
Overall Floor Load (With Rated Load)	998 kg/m ²
Maximum # of persons at 0 m/s wind rating	3
Maximum # of persons up to 12.5 m/s wind rating	1
Tyre Type	Solid, N/M
Tyre Size	16 x 5 x 12

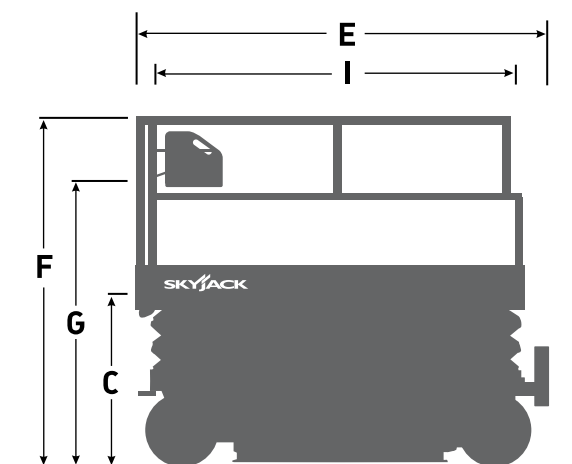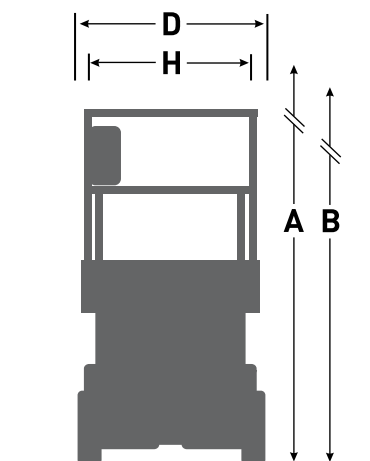

Skyjack Australia Pty Ltd
Unit 1, 35 Honeycomb Drive
Eastern Creek
NSW 2766
Australia
Phone +61 (0) 2 9854 0700
Fax +61 (0) 2 9854 0777
Email: jcranmer@skyjack.com

www.skyjack.com

SKYJACK
simply reliable™

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. AS marked platforms are in conformance to Standard AS/NZS 1418.10:2011.