

# LGMG

## SR1018D

### DIESEL RT SCISSOR LIFT

- Larger work platform with high capacity offers great productivity.
- Powerful diesel engine, oscillating axels and four-wheel drive provide better performance on most rough terrain job sites.
- The overload system and motion alarm help the operator to complete the job in a much safer way.
- Pull-out engine tray for easy access and maintenance.
- On-board self-diagnosis system makes it easier for quick troubleshooting.



# LGMG Diesel RT Scissor Lift

## SPECIFICATIONS

| MODELS                                | SR1018D ( SR3369D ) |          |
|---------------------------------------|---------------------|----------|
| Measurements                          | Metric              | Imperial |
| Work Height Max.                      | 11.7m               | 38'5"    |
| <b>A</b> Platform Height - Raised     | 9.7m                | 31'10"   |
| <b>B</b> Platform Height - Stowed     | 1.41m               | 4'8"     |
| <b>C</b> Platform Length              | 2.79m               | 9'2"     |
| <b>D</b> Platform Width               | 1.6m                | 5'3"     |
| <b>E</b> Overall Length (with ladder) | 3.76m               | 12'4"    |
| <b>F</b> Overall Width                | 1.79m               | 5'10"    |
| <b>G</b> Overall Height - Rails up    | 2.55m               | 8'4"     |
| Overall Height - Rails down           | 1.89m               | 6'2"     |
| <b>H</b> Extension Deck               | 1.52m               | 5'       |
| <b>I</b> Wheelbase                    | 2.29m               | 7'6"     |
| Ground Clearance-Center               | 0.23m               | 9"       |

### PRODUCTIVITY

|                               |                  |          |
|-------------------------------|------------------|----------|
| Max. Platform Occupancy       | 4(in) / 2(out)   |          |
| Platform Capacity             | 454kg            | 1000 lbs |
| Platform Capacity - Extension | 140kg            | 310 lbs  |
| Drive Height                  | Full Height      |          |
| Gradeability - Stowed         | 35%              |          |
| Min. Turning Radius           | 4.75m            | 15'7"    |
| Raise/Lower Speed             | 39 / 46s         |          |
| Brakes                        | Four-wheel brake |          |
| Drive Mode                    | 4x4              |          |
| Tires Type                    | RT Foam-filled   |          |
| Tires Size                    | 663x283mm        | 26"x11"  |

### POWER

|                    |                            |       |
|--------------------|----------------------------|-------|
| Power Source       | Kubota D1105 18.5kw/24.8hp |       |
| Fuel Tank Capacity | 53L                        | 14gal |

### HYDRAULIC SYSTEM

|                      |     |         |
|----------------------|-----|---------|
| Hydraulic Oil Volume | 50L | 13.2gal |
|----------------------|-----|---------|

### WEIGHT


|                                          |        |          |
|------------------------------------------|--------|----------|
| Machine Weight with Outriggers (CE/ANSI) | 4330kg | 9545 lbs |
|------------------------------------------|--------|----------|

### STANDARD FEATURES

|                          |                                    |
|--------------------------|------------------------------------|
| Proportional control     | Emergency stop device              |
| Foldable guardrail       | Manual brake release               |
| Emergency descent        | Tilt alarm with lift cut-out       |
| Oscillating axle         | Overload sensing system            |
| Self-lock entry gate     | Intelligent diagnostic system      |
| All motions alarm        | Descent alarm with flashing beacon |
| Auto-leveling outriggers | RT Foam-filled tires               |

### OPTIONAL

|                             |                               |
|-----------------------------|-------------------------------|
| Telematics                  | Solid tires                   |
| AC power to platform        | Solid non-marking tires       |
| Cold weather package        | Foam-filled non-marking tires |
| Biodegradable hydraulic oil |                               |

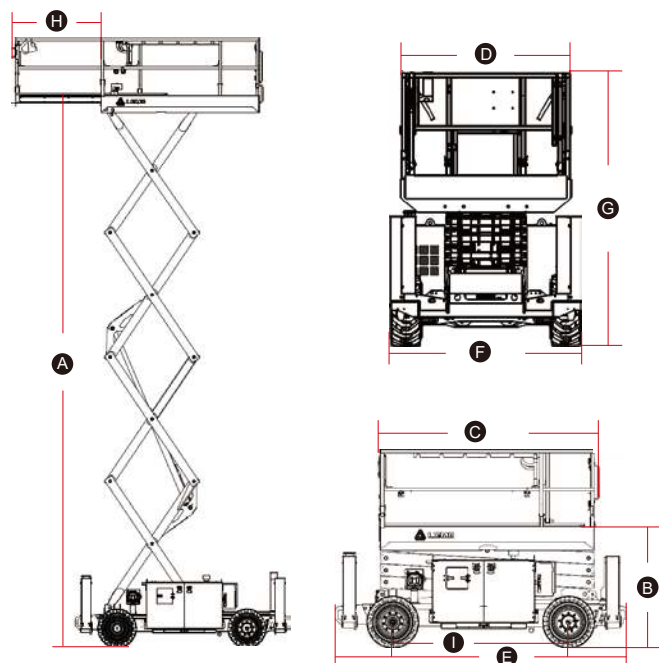

Please contact LGMG or local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purpose only. This brochure comes into effect in May, 2023.

## LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China  
Email: sales@lmgm.com.cn Tel: +86 531 6787 9283

## LGMG Europe B.V.

Address: Donker Duyvisweg 301, 3316 BL Dordrecht, The Netherlands  
Email: sales@lmgmeurope.com Tel: +31 850 642 777

## LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States  
Email: sales@lmgmna.com Tel: +1 833 288 5464

www.lmgmlifts.com

 **LGMG**  
RELIABILITY IN ACTION