



Exceptional productivity

- Load capacity up to 450 kg (C8W and C10)
- Driveable at full height
- Both inside and outside use with the same load capacity
- Extended platform
- Width of 1.20 m
- Long working cycles

Robust, reliable, easy to maintain







COMPACT 8 W / 10 / 12

ELECTRIC SCISSOR LIFTS

TECHNICAL DATA

Compact 12

Working height	11.98 m
Platform height	9.98 m
Driveable at full height up to	9.98 m
Lift capacity - inside	300 kg
Lift capacity - outside	300 kg
A Platform length - outside	2.31 m
B Platform length - extended	3.23 m
Length - extension	0.92 m
C Platform width - outside	1.2 m
E Storage height	1.53 m
D Height - stowed	2.39 m
F Overall width	1.2 m
G Length	2.49 m
H Wheelbase	1.86 m
I Ground clearance - Center	13 cm
Ground clearance - Pothole guards deployed	2.5 cm
Drive speed	0.8 - 2.9 km/h
Gradeability	23 %
Tilt	2 °
Lift / lower speed	58 s / 52 s
Turning radius - outside	2.5 m
Non-marking tires	15x5
Batteries	24 V - 340 Amph (C20)
Hydraulic system capacity	27 l
Weight	2 470 kg

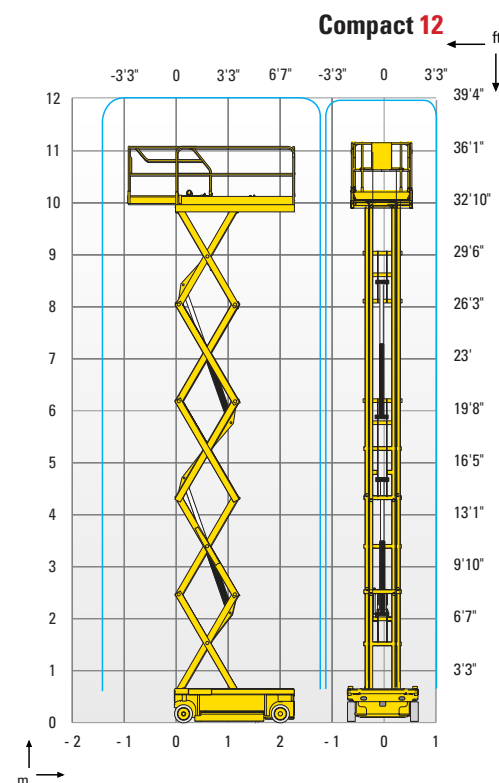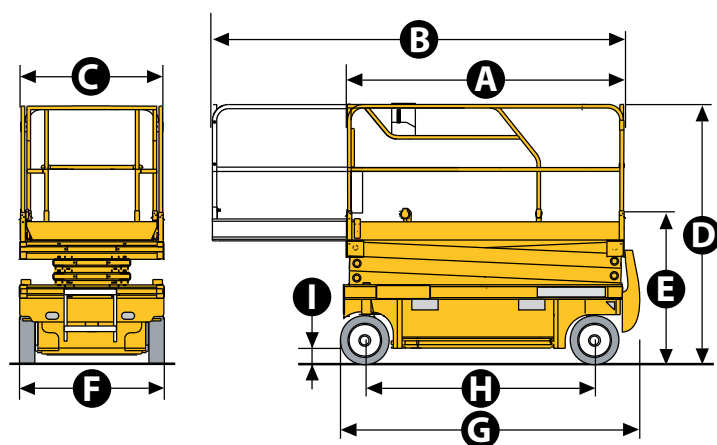

STANDARD EQUIPMENT

- Pothole guards
- Battery charge indicator
- Proportional lift and drive
- Removable control box in platform
- Swing out component tray
- Battery charger with automatic stop
- Solid non-marking tyres
- Free wheeling device
- Tilt controller
- Load Management System in the platform
- Manual platform lowering valve
- Integrated forklift pockets
- Towing hooks
- Horn
- Hourmeter

EH
EQUIP HERE

Access | Forklifts | Telehandlers

