
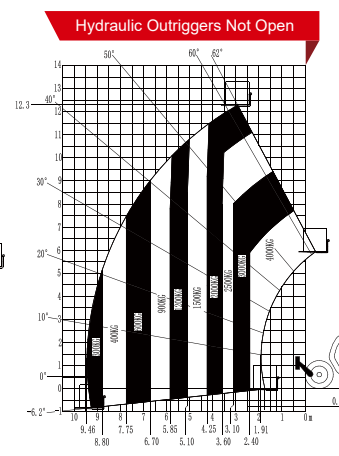
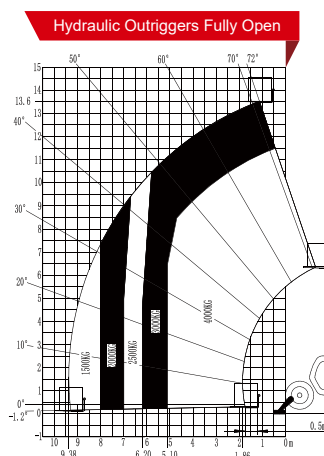



LGMG TELEHANDLERS

SPECIFICATIONS

MODELS	H1440
Measurements	Metric
A Max. Lifting Height	13.6m
Max. Outreach	9.22m
B Overall Length	6.08m
C Overall Width	2.44m
D Overall Height	2.68m
E Wheelbase	3.07m
F Wheel Track	1.96m
Ground Clearance	0.41m
PRODUCTIVITY	
Max. Capacity	4000kg
Gradeability-Unladen	65%
Min. Turning Radius	4.2m
Tilt Angle	±9°
Drive /Steering Mode	4 Wheel Drive / 4 Wheel Steer
Primary Boom Ascending Time	7.5-17.5s
Primary Boom DescendingTime	13.5-23.5s
Boom Extending Time	12.5-22.5s
Boom Retracting Time	8-18s
Forward - First Gear Travel Speed	5km/h
Forward - Second Gear Travel Speed	12km/h
Forward - Third Gear Travel Speed	20km/h
Forward - Fourth Gear Travel Speed	30km/h
Backward - First Gear Travel Speed	5km/h
Backward - Second Gear Travel Speed	12km/h
Backward - Third Gear Travel Speed	20km/h
Max. Braking Distance-Unladen	≤5.5m (20km/h)
Standard Tyres	440/80R24
POWER	
Manufacturer	Perkins
Rated Power	74.5kw
Max. Torque	430N.m
Displacement	3620ml
TANK CAPACITIES	
Hydraulic Oil Capacity	180L
Fuel Tank Capacity	150L
WEIGHT	
Machine Weight	12050kg



Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China
Email: sales@lmg.com.cn Tel: +86 531 6787 9283

LGMG Europe B.V.

Address: Donker Duyvisweg 301, 3316 BL Dordrecht, The Netherlands
Email: sales@lmg-europe.com Tel: +31 850 642 777

LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States
Email: sales@lmg-na.com Tel: +1 833 288 5464

www.lmg-lifts.com

 **LGMG**
RELIABILITY IN ACTION