

SJ4726/32

ELECTRIC SCISSORS



STANDARD FEATURES

- Drivable at full height
- Variable speed, rear two wheel hydraulic drive
- Dual holding brakes
- SKYCODED™ Color coded and numbered wiring system
- On-board visual interface with diagnostic capabilities
- Shroud style, impact resistant composite control box with extended cable
- Proportional controls for drive & lift functions
- Tilt sensor (3.5° x 1.5°)
- 4' (1.22 m) Roll out extension deck
- 24V DC Power source
- Low voltage battery protection
- 25% Gradeability
- Solid rubber, non-marking tires
- Pothole protection system
- 110V AC Outlet on platform with GFI
- 28 mph (12.5 m/s) Wind rating
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Lanyard attachment points
- Operator horn
- Forklift pockets and tie down/lift lugs
- Overload sensing system
- Fold down hinged railing system
- Half height spring hinged entry gate
- Telematics ready
- 2-Year Gold Leaf Warranty (5-year structural warranty)

OPTIONS

- Light duty pipe rack
- Heavy duty pipe rack
- Board carrier
- Tool caddy
- Flashing light
- Dual flashing lights
- 800W AC Inverter
- 250 Ah Batteries (cannot be combined with EE rating package)
- AGM Batteries
- Lockable swingout trays
- EE Rating package (not available with telematics keypad)
- Full height spring hinged entry gate
- Bio oil
- Secondary Guarding Lift Enable (SGLE)
- Non-destructive testing
- ECOTRAY leak containment system
- ELEVATE telematics (3-year or 5-year plans available)
- ELEVATE Battery Management System (BMS)*
- Warranty options (3-year or 5-year plans available)

† Standard lead times may be increased when optional equipment is added, consult factory.



‡ Capacities and machine weights may differ when options are added.

* Only available with ELEVATE telematics

SKYJACK
simply reliable

SJ4726/32 ELECTRIC SCISSORS

Dimensions		SJ4732
A Work Height		37' 8" (11.48 m)
B Raised Platform Height		31' 8" (9.65 m)
C Lowered Platform Height		50" (1.27 m)
D Overall Width		47" (1.19 m)
E Overall Length		91.6" (2.32 m)
F Stowed Height (Rails Up)		94" (2.39 m)
G Stowed Height (Rails Down)		78.5" (1.99 m)
H Platform Width (Inside Dimension)		42" (1.07 m)
I Platform Length (Inside Dimension)		83" (2.11 m)
Specifications		SJ4732
Extension Deck (Roll Out)		4' (1.22 m)
Ground Clearance (Pothole Raised)		4.0" (10.2 cm)
Ground Clearance (Pothole Deployed)		0.5" (1.3 cm)
Wheelbase		69" (1.75 m)
Weight		5,496 lbs (2,492 kg)
Gradeability		25%
Turning Radius (Inside)		28" (0.71 m)
Turning Radius (Outside)		104" (2.64 m)
Lift Time (With Rated Load)		50 sec
Lower time (With Rated Load)		52 sec
Drive Speed (Stowed)		2.0 mph (3.2 km/h)
Drive Speed (Raised)		0.6 mph (1.0 km/h)
Maximum Drive Height		Full Height
Capacity (Overall)		700 lbs (318 kg)
Distributed Capacity (Main Platform)		450 lbs (204 kg)
Distributed Capacity (Extension Deck)		250 lbs (113 kg)
Local Floor Load (With Rated Load)		124 psi (856 kPa)
Overall Floor Load (With Rated Load)		222 psf (1,083 kg/m ²)
Maximum # of persons at 0 mph (0 m/s) wind rating		2
Maximum # of persons up to 28 mph (12.5 m/s) wind rating		1
Tire Type		Solid, N/M
Tire Size		16 x 5 x 12

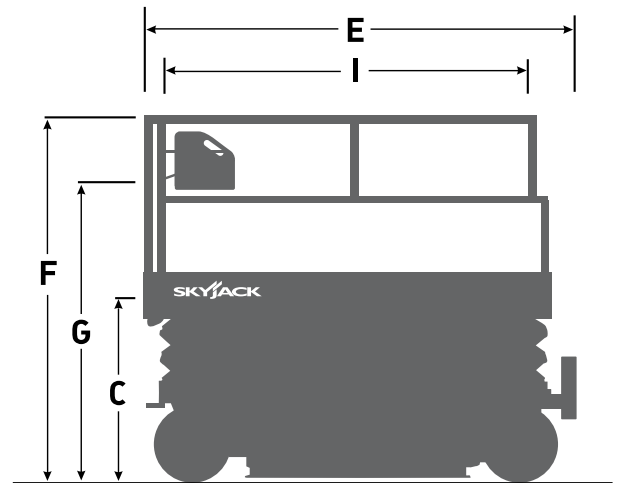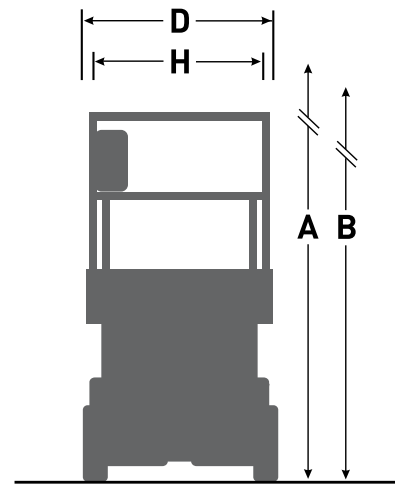

Skyjack Head Office
 55 Campbell Rd. Guelph, ON Canada N1H 1B9
 Sales Inquiries: 1-877-755-4387 (1-877-SJLIFTS)
 Main Switchboard: 1-800-265-2738
 Phone: 519-837-0888
 Fax: 519-837-8104
 Email: skyjack@skyjack.com

www.skyjack.com

SKYJACK
 simply reliable