




ATHENA

870 BL
EVO



**TAKES ON CHALLENGING TERRAIN
LIKE NO OTHER SCISSOR LIFT
ON THE MARKET**



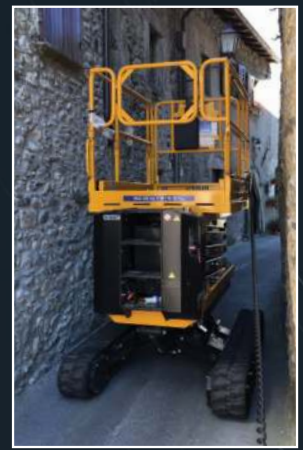

Athena 870 EVO

Basket capacity	250 kg (2 op.)
Basket size	1.50 x 1.20 m
Max working height	7.9 m
Moving height platform floor	5.9 m
Moving height	6.0 m (5.0 m)*
Powered Standard	Diesel Kubota Z482
Accelerator	Automatic
Undercarriage	Bi-Levelling
Basket levelling	Automatic
Longitudinal levelling front	+/- 16°
Longitudinal levelling rear	+/- 20°
Lateral levelling	+/- 15°
Power generator (option)	220V-1kW
Electric motor (option)	220V-2.2kW
Hydraulic commands	Proportionals
Direction-control system	Yes
Easy-drive system	Yes
Kit for high speed	Max 2.40 km/h
Ground emergency	Yes
Control of inclination	Automatic
Pro-active levelling	Yes
Gradeability	25°
Side slope	21°
Length	2.14 m
Width	1.30 ÷ 1.50 m
Minimum machine height with folded railings and narrow tracks	2.28 (1.98) m
Minimum machine height with folded railings and wide tracks	1.98 (1.68) m
Total weight	2460 kg
Compliance	EN 280, ANSI, CSA, ASNZS1418

*Maximum working height with levelling permitted.

FEATURES



Bi-Levelling Technology



Automatic Levelling*



Compact and Versatile



High Powered Diesel Engines




Intuitive Controls



Extendable Platform

ATHENA 870 EVO

DIMENSIONS

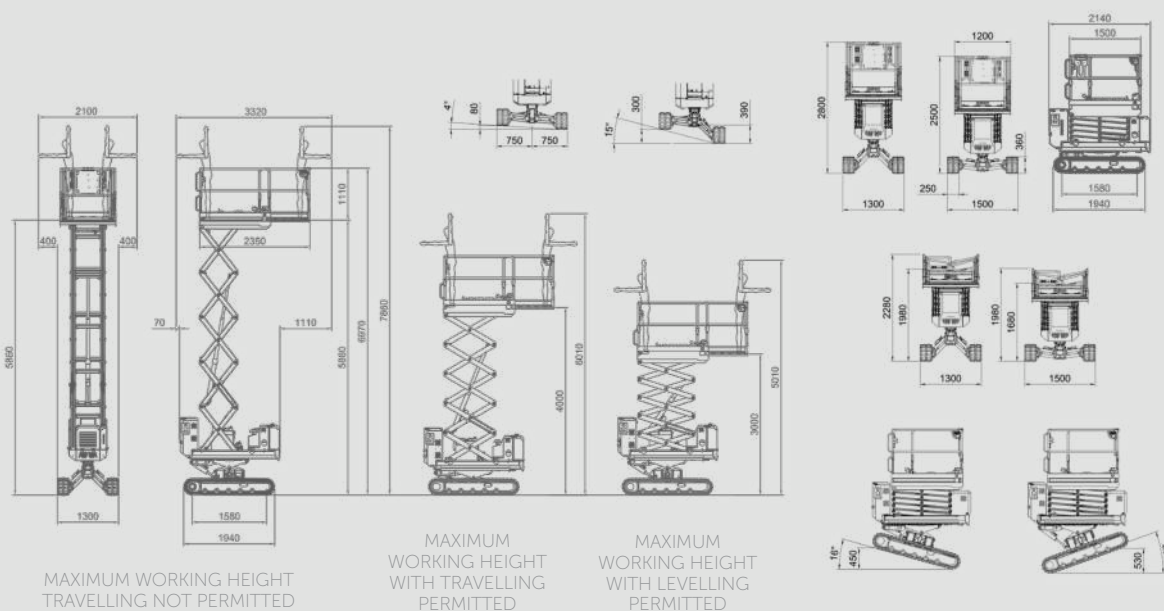

*Automatic levelling only available in the EVO model.