

LGMG

M0810JE

VERTICAL MAST LIFTS



- Compact size and light-weight, zero tail-swing, easy to operate and transport.
- Eco-friendly, zero-emission, highly efficient electric drive, more productive with longer working hours.
- Excellent "up-and-over" capability, 3.2m (10' 6") horizontal outreach and larger working envelope.
- Easy to maintain, reducing cost.

LGMG Vertical Mast Lifts

SPECIFICATIONS


MODELS	M0810JE (M2640JE)	
Measurements	Metric	Imperial
Working Height Max.	10m	32'10"
Platform Height(Raised)	8m	26'3"
Horizontal Outreach	3.2m	10'6"
Up and Over Clearance Max.	6.6m	21'8"
Platform Size(L×W)	0.98x0.72m	39"x28"
A Overall Length	2.6m	8'6"
B Overall Width	1m	3'3"
C Overall Height(Stowed)	1.99m	6'6"
D Wheelbase	1.2m	3'11"
E Ground Clearance	0.1m	4"
PRODUCTIVITY		
Max. Platform Occupancy	2 (in) / 1 (out)	
Platform Capacity	200kg	440 lbs
Drive Mode	Rear Wheel	
Brakes	Rear Wheel	
Turntable Rotation	345°	345°
Max. Drive Speed (Stowed)	5km/h	3mph
Max. Drive Speed (Raised)	0.43km/h	0.27mph
Gradeability	25%	25%
Tailswing	0	0
Tire Size	380x130mm	15"x5"
POWER		
Power Source	24V 250Ah	
HYDRAULIC SYSTEM		
Hydraulic Oil Capacity	6.5L	1.7gal
WEIGHT		
Machine Weight (CE/ANSI)	2720kg	5997 lbs

STANDARD FEATURES


Proportional control	Emergency stop device
Horn/Hour meter	Charge protection system
Full-height drive	Manual emergency pump
All motions alarm	Telematics connector
Brake release	Descent alarm with flashing beacon
Emergency descent	Solid non-marking tires
Tilt alarm	

OPTIONAL

AC power to platform	Anti-collision protection
Telematics	Biodegradable hydraulic oil

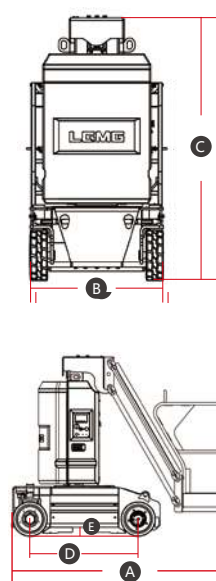

M0810JE Working Range

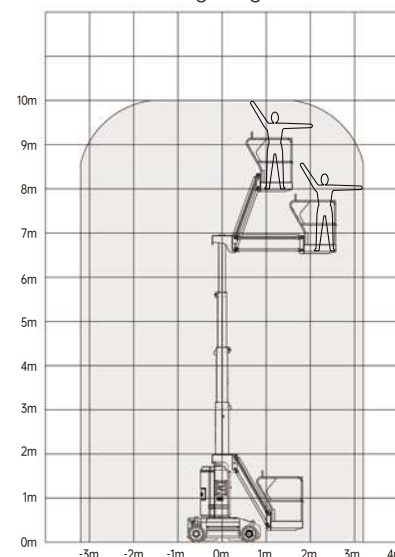

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only. This brochure comes into effect in May, 2023.